


# A\_BGE

Industrial gas water heaters with natural draft with electronic ignition

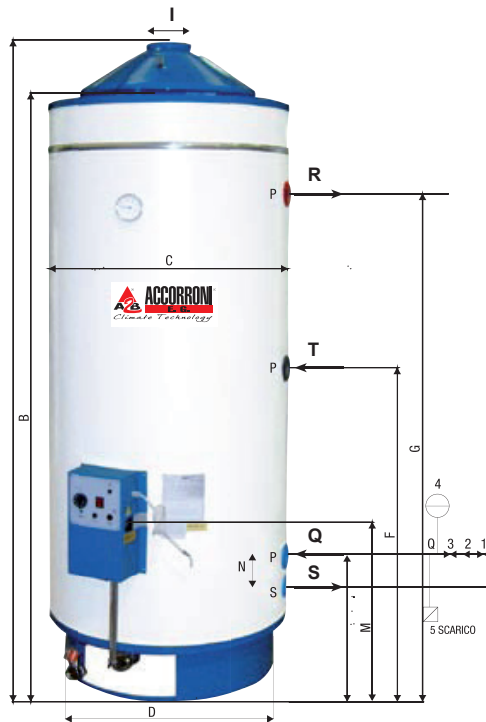

## Size and dimensions A\_BGE

	A_BGE 150	A_BGE 200	A_BGE 300	A_BGE 400	A_BGE 500	A_BGE 600	A_BGE 800	A_BGE 1000	A_BGE 1500	A_BGE 2000
A	1300	1500	1700	1760	1990	2090	2000	2220	2180	2500
B	1200	1400	1500	1560	1790	1890	1800	2020	1900	2300
C	540	540	700	750	750	800	990	990	1290	1290
D	480	480	600	650	650	700	900	900	1200	1200
E	360	360	375	380	380	390	460	460	340	340
F	600	725	845	850	920	990	950	1070	840	940
G	1230	1430	1235	1270	1520	1610	1440	1680	1400	1800
I	100	100	140	140	140	140	160	160	160	160
M	400	400	620	630	630	660	710	720	450	450
N	-	-	100	100	100	100	120	120	120	120
P	3/4"	3/4"	1"1/4	1"1/4	1"1/4	1"1/4	1"1/4	1"1/4	1"1/4	1"1/4
Q	COLD WATER INLET 1 spy valve 2 pressure reducer 3 safety valve 4 expansion vase									
R	HOT WATER OUTLET									
S	DRAIN CONNECTION 1/2" 5 drain cock									
T	RECIRCULATION CONNECTION									

Model	Code	€
<b>A_BGE 150</b>	<b>37302000</b>	<b>2.020,00</b>
<b>A_BGE 200</b>	<b>37302001</b>	<b>2.150,00</b>
<b>A_BGE 300</b>	<b>37302002</b>	<b>3.230,00</b>
<b>A_BGE 400</b>	<b>37302003</b>	<b>3.640,00</b>
<b>A_BGE 500</b>	<b>37302004</b>	<b>3.970,00</b>
<b>A_BGE 600</b>	<b>37302005</b>	<b>4.550,00</b>
<b>A_BGE 800</b>	<b>37302006</b>	<b>6.040,00</b>
<b>A_BGE 1000</b>	<b>37302007</b>	<b>7.600,00</b>
<b>A_BGE 1500</b>	<b>37302008</b>	<b>10.090,00</b>
<b>A_BGE 2000</b>	<b>37302009</b>	<b>11.410,00</b>

## Technical data water heats A\_BGE

DESCRIPTION	U.M.	A_BGE150	A_BGE200	A_BGE300	A_BGE400	A_BGE500	A_BGE600	A_BGE800	A_BGE1000	A_BGE1500	A_BGE2000
heat capacity	kW	9,90	9,90	17,40	23,70	23,70	23,70	37,00	37,00	42,00	42,00
Thermal power	kW	8,20	8,20	14,60	19,90	19,90	19,90	32,50	32,50	35,30	35,30
Capacity gas Nat. Gas G20	m <sup>3</sup> /h	1,00	1,00	1,80	2,50	2,50	2,50	3,90	3,90	4,44	4,44
Power max Butane G30	kg/h	0,75	0,75	1,30	1,80	1,80	1,80	2,90	2,90	3,30	3,30
15 °C-1.013 mbar Propane G31	kg/h	0,74	0,74	1,30	1,80	1,80	1,80	2,90	2,90	3,30	3,30
Warm-up time - minutes	min.	40	48	45	33	36	40	38	44	67	70
Single drawdown at 45 °C	l/h	195	195	418	570	570	570	1035	1035	1047	1047
Maximum water pressure	bar	6		6				6			
hydraulic connections	"	3/4		1 1/4				1 1/4			
Diameter gas supply	"	1/2		1/2				1/2			
Diameter coaxial exhaust fumes	mm	100		140				160			
Empty weight	kg	55	64	107	117	135	158	252	285	350	420
Operating weight	kg	205	264	347	507	585	723	723	1235	1800	2320