





















VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessori VCM		Code	€
	<p>DISTRIBUTION BOX made of galvanized sheet with 12 connections for pipes Ø 75 dimensions mm: length 600, width 200, height 110</p> <p>12 outlets box Ø 75 - collar Ø 125 12 outlets box Ø 75 - collar Ø 160</p>	<p>37900076 37900077</p>	<p>362,00 362,00</p>
	<p>DISTRIBUTION BOX made of galvanized sheet with 12 connections for pipes Ø 92 dimensions mm: length 600, width 200, height 160</p> <p>12 outlets box Ø 92 - collar Ø 125 12 outlets box Ø 92 - collar Ø 160</p>	<p>37900078 37900079</p>	<p>366,00 366,00</p>
	<p>DISTRIBUTION BOX with twelve connections made of galvanized sheet, equipped internal sound-absorbing insulation with 12 connections for pipes Ø 75 and Ø 92, plenum collar Ø 150 dimensions mm: length 400, width 400, height 110</p>	37900093	288,00
 	<p>DISTRIBUTION PLENUM for flexible ducted pipe Ø 75 made of externally insulated galvanized sheet metal equipped with rear air inlet collar with double diameter Ø 150 / Ø 200 complete with fixing brackets</p>		
	<p>plenum 4 departures L 220mm H 230mm P 250mm plenum 6 departures L 330mm H 230mm P 250mm plenum 8 departures L 440mm H 230mm P 250mm plenum 10 departures L 550mm H 230mm P 250mm plenum 12 departures L 660mm H 230mm P 250mm</p>	<p>37900400 37900401 37900402 37900403 37900404</p>	<p>236,00 300,00 385,00 462,00 524,00</p>
 	<p>DISTRIBUTION PLENUM for flexible ducted pipe Ø 92 made of externally insulated galvanized sheet metal equipped with rear air inlet collar with double diameter Ø 150 / Ø 200 complete with fixing brackets</p>		
	<p>plenum 4 departures L 220mm H 230mm P 250mm plenum 6 departures L 330mm H 230mm P 250mm plenum 8 departures L 440mm H 230mm P 250mm plenum 10 departures L 550mm H 230mm P 250mm plenum 12 departures L 660mm H 230mm P 250mm</p>	<p>37900405 37900406 37900407 37900408 37900409</p>	<p>242,00 312,00 402,00 484,00 548,00</p>
 	<p>DISTRIBUTION PLENUM for 120 x 35 oval flexible ducted pipe made of externally insulated galvanized sheet metal with rear air inlet collar with double diameter Ø 150 / Ø 200 complete with fixing brackets</p>		
	<p>plenum 4 departures L 350mm H 210mm P 250mm plenum 6 departures L 520mm H 210mm P 250mm plenum 8 departures L 690mm H 210mm P 250mm plenum 10 departures L 860mm H 210mm P 250mm plenum 12 departures L 1030mm H 210mm P 250mm</p>	<p>37900410 37900411 37900412 37900413 37900414</p>	<p>332,00 456,00 590,00 698,00 818,00</p>
 	<p>DISTRIBUTION PLENUM for flexible ducted pipe Ø 150 made of externally insulated galvanized sheet metal equipped with rear air inlet collar with double diameter Ø 150 / Ø 200 complete with fixing brackets</p>		
	<p>plenum 2 departures L 380mm H 210mm P 250mm plenum 3 departures L 570mm H 210mm P 250mm plenum 4 departures L 760mm H 210mm P 250mm plenum 5 departures L 950mm H 210mm P 250mm</p>	<p>37900415 37900416 37900417 37900418</p>	<p>136,00 152,00 170,00 182,00</p>



VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC		Code	€
	CONNECTORS FOR FLEXIBLE PIPES FOR BOXES AND PLENUMS complete with sealing hooks		
	connector for flexible hose for cassette and plenum Ø 75 connector for flexible hose for cassette and plenum Ø 92	37900343 37900066	20,00 22,00
	DIAPHRAGM FOR MANIFOLD BOX air flow regulator dimensions: Ø 81 mm - Ø neck 30 mm	37900344	8,00
	FLEXIBLE ROUND HDPE PIPES double wall, self-extinguishing treatment, anti UV, antistatic, length 50 m		
	flexible round tube for air inlet Ø 75 flexible round air inlet pipe Ø 92	37900345 37900065	264,00 330,00
	120 mm x 35 mm HDPE FLEXIBLE OVAL TUBE double-skinned, self-extinguishing, anti UV, antistatic treatment Roll length 20 m	37900062	860,00
	SLEEVE FOR FLEXIBLE ROUND TUBE tube-tube connection with sealing hooks sleeve for flexible air inlet hose		
	Ø 75 sleeve for flexible air inlet hose Ø 92	37900346 37900064	19,00 22,00
	DUST CAPS dust protection cap for tubes and connectors		
	dust cap for Ø 75 hose. dust cap for Ø 92 hose	37900347 37900348	4,00 4,00
	90 ° ELBOW BEND WITH CONNECTION for corrugated pipes, with sealing hooks and o-rings		
	sharp bend 90° Ø 75 sharp bend 90° Ø 92	75800930 37900301	30,00 32,00
	90 ° ELBOW BEND FOR FLOOR WITH CONNECTION for corrugated pipes, to be positioned on the floor, with sealing hooks and o-rings		
	90 ° elbow bend for floor Ø 75 90 ° elbow bend for floor Ø 92	37900350 37900300	31,00 33,00
	STRAIGHT FITTING BETWEEN Ø 75 FLEXIBLE HOSE AND GRID for connection to the distribution terminal grid complete with connection plate, sealing hooks and dust caps	37900351	88,00





VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC	Code	€
	<p>90 ° FITTING BETWEEN Ø 75 FLEXIBLE HOSE AND GRID for connection to the distribution terminal grid complete with connection plate, sealing hooks and dust caps</p>	<p>37900352 88,00</p>
	<p>90 ° FITTING BETWEEN Ø 92 FLEXIBLE HOSE AND GRID for connection to the distribution terminal grid complete with connection plate, sealing hooks</p>	<p>37900353 50,00</p>
	<p>STRAIGHT CONNECTION BETWEEN Ø 92 FLEXIBLE HOSE AND GRID for connection to the distribution terminal grid complete with connection plate, sealing hooks</p>	<p>37900339 50,00</p>
	<p>"LUCINA" RETURN GRILLE max delivery flow rate 75 m³ / h, 360 ° adjustable slats</p>	<p>37900341 38,00</p>
	<p>"CLOE" DELIVERY / RETURN GRID suitable for wall application max delivery flow rate 75 m³ / h, max return flow rate 50 m³ / h</p>	<p>37900342 38,00</p>
	<p>SLEEVE FOR FLEXIBLE OVAL HOSE AIR INLET hose-hose connection with sealing hooks</p>	<p>37900305 38,00</p>
	<p>EXTENDED SLEEVE FOR FLEXIBLE OVAL AIR INLET PIPE tube-tube connection with sealing hooks</p>	<p>37900354 54,00</p>
	<p>HORIZONTAL OVAL ELBOW CURVE 90 ° with connection for corrugated pipes with sealing hooks and O-RING gaskets</p>	<p>37900063 42,00</p>
	<p>VERTICAL OVAL ELBOW BEND 90 ° with connection for corrugated pipes with sealing hooks and O-RING gaskets</p>	<p>37900060 44,00</p>
	<p>90 ° FITTING FOR OVAL FLEXIBLE HOSE AND OVAL GRID complete with sealing hooks and O-RING gaskets</p>	<p>37900061 68,00</p>

VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC		Code	€
	ROUND-OVAL FITTING FOR AIR INLET FLEXIBLE HOSE adapter for connecting the oval hose and the Ø 92 round hose	37900059	54,00
	EPDM OVAL GASKET for oval hose made of EPDM	37900055	8,00
	INSULATED PLENUMS FOR LINEAR DIFFUSERS		
	mod. 1 slot 2 connections	37900356	210,00
	Ø 75 mod. 1 slot 2 connections	37900357	214,00
	Ø 90 mod. 2 slots 2 connections	37900358	224,00
	Ø 75 mod. 2 slots 2 connections Ø 90	37900057	228,00
	LINEAR DIFFUSERS IN ANODIZED / WHITE PAINTED ALUMINUM		
	mod. 1 slot length 1 mt. White	37900150	90,00
	mod. 1 slot length 1 mt. aluminum	37900359	72,00
	mod. 2 slots length 1 mt. White	37900058	126,00
	mod. 2 slots length 1 mt. aluminum	37900360	120,00
	PLENUM CEILING / WALLS / FLOORS designed for side, top and rear pipe inlet, supplied complete with fitting for flexible air inlet pipe		
	mod. 330x180 profondità 110 mm 1 attacco Ø 75	37900361	108,00
	mod. 330x180 profondità 110 mm 1 attacco Ø 90	37900336	110,00
	mod. 430x180 profondità 110 mm 1 attacco Ø 75	37900362	132,00
	mod. 430x180 profondità 110 mm 1 attacco Ø 90	37900086	140,00
	mod. 430x180 profondità 110 mm 2 attacchi Ø 75	37900363	152,00
	mod. 430x180 profondità 110 mm 2 attacchi Ø 90	37900338	162,00
	"VANESSA" STAINLESS STEEL GRILLS made of satin stainless steel, fixing by screws (customization possible)		
	mod. 340x190 mm	37900337	56,00
	mod. 440x190 mm	37900068	82,00
	"GALATEA" STAINLESS STEEL GRILLS made of satin stainless steel, fixing by screws (customization possible)		
	mod. 340x190 mm	37900364	56,00
	mod. 440x190 mm	37900365	82,00
	"IRIDE" STAINLESS STEEL GRILLS made of satin stainless steel, fixing by screws (customization possible)		
	mod. 340x190 mm	37900366	56,00
	mod. 440x190 mm	37900367	82,00

VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC


Codice

€

DELIVERY PORTS IN ANODIZED ALUMINUM

The vents consisting of a frame and a double row of horizontal and vertical fins are individually adjustable.

fixing by means of invisible clips allows an aesthetically valid application.





mod. 01A	L 232 x H 132 mm	L1 200 x H1 100 mm	37900368	46,00
mod. 02A	L 332 x H 132 mm	L1 300 x H1 100 mm	37900369	54,00
mod. 03A	L 432 x H 132 mm	L1 400 x H1 100 mm	37900370	66,00
mod. 04A	L 632 x H 132 mm	L1 600 x H1 100 mm	37900371	82,00
mod. 05A	L 1032 x H 132 mm	L1 1000 x H1 100 mm	37900372	128,00
mod. 06A	L 332 x H 182 mm	L1 300 x H1 150 mm	37900373	68,00
mod. 07A	L 332 x H 232 mm	L1 300 x H1 200 mm	37900374	70,00
mod. 08A	L 432 x H 182 mm	L1 400 x H1 150 mm	37900375	74,00
mod. 09A	L 432 x H 232 mm	L1 400 x H1 200 mm	37900376	84,00
mod. 10A	L 532 x H 182 mm	L1 500 x H1 150 mm	37900377	80,00
mod. 11A	L 532 x H 232 mm	L1 500 x H1 200 mm	37900378	94,00

DELIVERY PORT IN ALUMINUM PAINTED WHITE

The vents consisting of a frame and a double row of horizontal and vertical fins are individually adjustable.

fixing by means of invisible clips allows an aesthetically valid application.




mod. 01V	L 232 x H 132 mm	L1 200 x H1 100 mm	37900088	38,00
mod. 02V	L 332 x H 132 mm	L1 300 x H1 100 mm	37900104	46,00
mod. 03V	L 432 x H 132 mm	L1 400 x H1 100 mm	37900105	56,00
mod. 04V	L 632 x H 132 mm	L1 600 x H1 100 mm	37900379	82,00
mod. 05V	L 1032 x H 132 mm	L1 1000 x H1 100 mm	37900380	128,00
mod. 06V	L 332 x H 182 mm	L1 300 x H1 150 mm	37900091	58,00
mod. 07V	L 332 x H 232 mm	L1 300 x H1 200 mm	37900106	60,00
mod. 08V	L 432 x H 182 mm	L1 400 x H1 150 mm	37900107	62,00
mod. 09V	L 432 x H 232 mm	L1 400 x H1 200 mm	37900070	70,00
mod. 10V	L 532 x H 182 mm	L1 500 x H1 150 mm	37900108	68,00
mod. 11V	L 532 x H 232 mm	L1 500 x H1 200 mm	37900109	86,00

INSULATED PLENUM PREPARED FOR 3 INPUTS Made of galvanized sheet metal with external insulation in closed cell polyethylene 3 mm thick and equipped as standard with one or two PPS collars for connecting flexible circular pipes.




rear collar



side collar

upper collar



mod. 01	L 210 x H 110 mm	(attacco 125/150 mm)	37900005	116,00
mod. 02	L 310 x H 110 mm	(attacco 125/150 mm)	37900098	120,00
mod. 03	L 410 x H 110 mm	(attacco 125/150 mm)	37900099	138,00
mod. 04	L 610 x H 110 mm	(attacco 2 x 125/150 mm)	37900043	168,00
mod. 05	L 1010 x H 110 mm	(attacco 2 x 125/150 mm)	37900382	180,00
mod. 06	L 310 x H 160 mm	(attacco 150 mm)	37900090	124,00
mod. 07	L 310 x H 210 mm	(attacco 150/200 mm)	37900103	144,00
mod. 08	L 410 x H 160 mm	(attacco 150 mm)	37900101	172,00
mod. 09	L 410 x H 210 mm	(attacco 150/200 mm)	37900069	138,00
mod. 10	L 510 x H 160 mm	(attacco 2 x 150 mm)	37900102	150,00
mod. 11	L 510 x H 210 mm	(attacco 2 x 150/200 mm)	37900130	180,00

VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation


Accessories VMC

Code

€

CALIBRATION DAMPER


The vents consisting of a frame and a double row of horizontal and vertical fins are individually adjustable. fixing by means of invisible clips allows an aesthetically valid application.



for vents	mm	A mm	B mm	C mm		
mod. 01 S	232 x 132	185	80	55	37900094	26,00
mod. 02 S	332 x 132	285	80	55	37900110	32,00
mod. 03 S	432 x 132	385	80	55	37900113	52,00
mod. 04 S	632 x 132	585	80	55	37900383	40,00
mod. 05 S	1032 x 132	985	180	55	37900384	62,00
mod. 06 S	332 x 182	285	130	55	37900092	36,00
mod. 07 S	332 x 232	285	180	55	37900111	36,00
mod. 08 S	432 x 182	385	130	55	37900113	52,00
mod. 09 S	432 x 232	385	180	55	37900073	42,00
mod. 10 S	532 x 182	485	130	55	37900114	42,00
mod. 11 S	532 x 232	485	180	55	37900115	68,00





RETURN GRILLE IN WHITE PAINTED ALUMINUM WITH REMOVABLE FILTER FOR FALSE CEILING
White RAL 9016 painted aluminum material with fixing by means of screws for wall and ceiling installation with G4 filtration degree (ref. EN 779/2012 STANDARD)




mod. L 432 x H 132 mm	L1 390 x H1 90 mm	37900385	58,00
mod. L 332 x H 182 mm	L1 290 x H1 140 mm	37900386	62,00
mod. L 332 x H 232 mm	L1 290 x H1 190 mm	37900387	66,00
mod. L 432 x H 232 mm	L1 390 x H1 190 mm	37900388	78,00
mod. L 532 x H 332 mm	L1 490 x H1 290 mm	37900389	110,00



OPENABLE INTAKE GRILLE IN WHITE ABS PLASTIC WITH REMOVABLE FILTER AND INTEGRATED PLENUM FOR CEILING 48 °
C, G2 filtration degree (ref. EN 779/2012 STANDARD)



mod. 01	A 660 x B 540 mm	(innesto Ø 1 x 350 mm)	37900390	340,00
mod. 02	A 760 x B 440 mm	(innesto ovale 1 x 350 mm)	37900391	340,00
mod. 03	A 960 x B 440 mm	(innesto Ø 2 x 350 mm)	37900392	396,00
mod. 04	A 965 x B 565 mm	(innesto Ø 2 x 350 mm)	37900393	474,00




VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation


Accessories VMC

Code

€




OPENABLE INTAKE GRILLE IN WHITE ABS PLASTIC WITH REMOVABLE FILTER FOR FALSE CEILING
Grid made of white anti-condensation ABS, removable filter made of pleated nylon with fixing by clips operating temperature: from +5 ° C to +48 ° C, filtration degree G2 (ref. STANDARD EN 779/2012)



mod. 01	A 660 x B 540 mm	(profondità 60 mm)	37900131	156,00
mod. 02	A 760 x B 440 mm	(profondità 60 mm)	37900132	156,00
mod. 03	A 960 x B 440 mm	(profondità 60 mm)	37900133	178,00
mod. 04	A 965 x B 565 mm	(profondità 60 mm)	37900198	216,00




CIRCULAR DIFFUSERS IN ALUMINUM PAINTED WHITE RAL - 9016 WITH BUTTERFLY SHUTTERS AND INTEGRATED COLLAR
They are used for delivery and return of air. Thanks to the high induction, they can also be used at significant temperature differences between the supply air and the environment. They stand out for their high efficiency, silent operation and modern design.



	A mm	B mm	C mm		
mod. 01	Ø 260	Ø 210	Ø 150	37900135	90,00
mod. 02	Ø 310	Ø 260	Ø 200	37900027	108,00
mod. 03	Ø 360	Ø 310	Ø 250	37900137	134,00




ADJUSTABLE VENTILATION VALVE FOR AIR DELIVERY IN WHITE PAINTED METAL
The delivery valves can be applied to the ceiling in service rooms and bathrooms. the air flow is regulated by rotating the central cone. Made of steel sheet and painted white RAL 9010.



	A mm	B mm	C mm		
mod. 100	Ø 97,5	Ø 40	Ø 138	37900138	14,00
mod. 125	Ø 122,5	Ø 46	Ø 164	37900139	16,00
mod. 150	Ø 147,5	Ø 50	Ø 202	37900140	18,00
mod. 200	Ø 197,5	Ø 63	Ø 248	37900141	28,00



ADJUSTABLE AIR INTAKE VENTILATION VALVE IN WHITE PAINTED METAL
The return valves can be applied to the ceiling in utility rooms, bathrooms or shops. the air flow is regulated by rotating the central body. Made of steel sheet and painted white RAL 9010.



	A mm	B mm	C mm		
mod. 100	Ø 97,5	Ø 40	Ø 138	37900142	14,00
mod. 125	Ø 122,5	Ø 46	Ø 164	37900045	16,00
mod. 150	Ø 147,5	Ø 50	Ø 202	37900143	18,00
mod. 200	Ø 197,5	Ø 63	Ø 248	37900144	28,00

VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC

Code


€



ADJUSTABLE AIR INTAKE VENTILATION VALVE IN WHITE ABS PLASTIC

The return valves can be applied to the ceiling in service rooms and bathrooms. The air flow is regulated by rotating the central cone.

Made of white ABS material RAL 9010.



	A mm	B mm	C mm	D mm	E mm	F mm		
mod. Ø 80	80	76	65	120	55	20	37900330	10,00
mod. Ø 100	100	96	78	140	55	20	37900467	14,00
mod. Ø 125	125	120	110	165	55	20	37900468	16,00
mod. Ø 150	150	145	125	188	55	20	37900469	18,00
mod. Ø 200	200	195	180	235	55	20	37900470	34,00




SQUARE DIFFUSER IN WHITE ABS PLASTIC WITH PERFORATED SCREEN

White ABS material

operating temperature from -15 ° C to +48 ° C

37900145 168,00



A mm	B mm	C mm
450	595	80



CIRCULAR ADAPTER WITH SHUTTERS FOR SQUARE DIFFUSERS

Black ABS material

with circular adapter equipped with butterfly damper

mod. connection Ø 200 for square diffuser 450 x 450 mm

mod. connection Ø 250 for square diffuser 450 x 450 mm

reduction for adapter 200-150 mm

37900146 62,00

37900147 68,00


37900148 28,00



300x300 SQUARE MESH DIFFUSER IN WHITE ABS PLASTIC WITH PLENUM

Prevents condensation phenomena, operating temperature from +5 ° C to +48 ° C.

Fixing by means of clips suitable for supply and return of the Air



External frame A mm	Total height C mm	Footprint max B mm	Lateral oval neck graft Ø mm		
430 x 430	250	450	200	37900394	144,00

VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC

Code

€



1-SLOT LINEAR DIFFUSERS IN ANODIZED ALUMINUM AND WHITE PAINTED ALUMINUM

		L1 mm	H1 mm	L2 mm	H2 mm		
<p>VISTA ANTERIORE</p>	mod. 600 white	607	50	660	75	37900149	74,00
	mod. 600 anotized	607	50	660	75	37900395	66,00
	mod. 800 white	807	50	860	75	37900096	84,00
	mod. 800 anotized	807	50	860	75	37900396	72,00
	mod. 1000 white	1007	50	1060	75	37900150	90,00
	mod. 1000 anotized	1007	50	1060	75	37900359	72,00
<p>VISTA POSTERIORE</p>	mod. 1500 white	1507	50	1560	75	37900097	132,00
	mod. 1500 anotized	1507	50	1560	75	37900397	114,00
	mod. 2000 white	2007	50	2060	75	37900151	146,00
	mod. 2000 anotized	2007	50	2060	75	37900431	126,00



INSULATED PLENUM WITH UPPER CONNECTION FOR 1 SLOT LINEAR DIFFUSER

In insulated galvanized sheet metal with external closed cell polyethylene coating (3 mm thick). Collars for upper attachments supplied

	A mm	B mm	C mm	Ø mm		
	mod. 600	630	65	280	150 1 pz	37900152 126,00
	mod. 800	830	65	280	150 1 pz	37900153 140,00
	mod. 1000	1030	65	280	150 1 pz	37900154 152,00
	mod. 1500	1530	65	280	150 1 pz	37900155 214,00
	mod. 2000	2030	65	280	150 2 pz	37900156 272,00



LINEAR DIFFUSER WITH 2 SLOTS IN ANODIZED ALUMINUM AND WHITE PAINTED ALUMINUM

	L1 mm	H1 mm	L2 mm	H2 mm		
<p>FRONT VIEW</p>	mod. 600 white	607	90	660	115	37900157 112,00
	mod. 600 anotized	607	90	660	115	37900398 98,00
	mod. 800 white	807	90	860	115	37900158 124,00
	mod. 800 anotized	807	90	860	115	37900399 110,00
	mod. 1000 white	1007	90	1060	115	37900058 126,00
	mod. 1000 anotized	1007	90	1060	115	37900360 120,00
<p>REAR VIEW</p>	mod. 1500 white	1507	90	1560	115	37900159 184,00
	mod. 1500 anotized	1507	90	1560	115	37900419 160,00
	mod. 2000 white	2007	90	2060	115	37900160 224,00
	mod. 2000 anotized	2007	90	2060	115	37900420 194,00



INSULATED PLENUM WITH PREPARED UPPER CONNECTION WITH POST / LAT INPUTS FOR LINEAR DIFFUSER 2 SLOTS

In insulated galvanized sheet metal with external closed cell polyethylene coating (3 mm thick). Collars for upper attachments supplied. Collars for rear and side entrances available on request

	A mm	B mm	C mm	Ø mm		
	mod. 600	630	105	280	150 1 pz	37900161 150,00
	mod. 800	830	105	280	150 1 pz	37900162 170,00
	mod. 1000	1030	105	280	150 1 pz	37900163 178,00
	mod. 1500	1530	105	280	150 2 pz	37900164 220,00
	mod. 2000	2030	105	280	150 2 pz	37900165 284,00

VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC



Code

€



LINEAR DIFFUSERS WITH 3 SLOTS IN ANODIZED ALUMINUM AND WHITE PAINTED ALUMINUM

	L1 mm	H1 mm	L2 mm	H2 mm	Code	€
mod. 600 white	607	130	660	155	37900166	142,00
mod. 600 anodised	607	130	660	155	37900421	122,00
mod. 800 white	807	130	860	155	37900046	158,00
mod. 800 anodised	807	130	860	155	37900422	136,00
mod. 1000 white	1007	130	1060	155	37900167	192,00
mod. 1000 anodised	1007	130	1060	155	37900423	172,00
mod. 1500 white	1507	130	1560	155	37900072	248,00
mod. 1500 anodised	1507	130	1560	155	37900424	216,00
mod. 2000 white	2007	130	2060	155	37900168	302,00
mod. 2000 anodised	2007	130	2060	155	37900425	260,00




INSULATED PLENUM WITH PREPARED UPPER CONNECTION WITH POST / LAT INPUTS FOR LINEAR DIFFUSER 3 SLOTS

In insulated galvanized sheet metal with external closed cell polyethylene coating (3 mm thick). Collars for upper attachments supplied.



Collars for rear and side entrances available on request

	A mm	B mm	C mm	Ø mm	Code	€
mod. 600	630	145	280	150 1 pz	37900169	156,00
mod. 800	830	145	280	150 1 pz	37900047	176,00
mod. 1000	1030	145	280	150 1 pz	37900170	188,00
mod. 1500	1530	145	280	150 2 pz	37900071	246,00
mod. 2000	2030	145	280	150 2 pz	37900172	314,00



LINEAR DIFFUSERS WITH 4 SLOTS IN ANODIZED ALUMINUM AND WHITE PAINTED ALUMINUM

	L1 mm	H1 mm	L2 mm	H2 mm	Code	€
mod. 600 white	607	165	660	190	37900173	188,00
mod. 600 anodised	607	165	660	190	37900426	162,00
mod. 800 white	807	165	860	190	37900049	208,00
mod. 800 anodised	807	165	860	190	37900427	180,00
mod. 1000 white	1007	165	1060	190	37900054	224,00
mod. 1000 anodised	1007	165	1060	190	37900428	196,00
mod. 1500 white	1507	165	1560	190	37900174	312,00
mod. 1500 anodised	1507	165	1560	190	37900429	270,00
mod. 2000 white	2007	165	2060	190	37900175	392,00
mod. 2000 anodised	2007	165	2060	190	37900430	340,00




INSULATED PLENUM WITH PREPARED UPPER CONNECTION WITH POST / LAT INPUTS FOR LINEAR DIFFUSER 4 SLOTS

In insulated galvanized sheet metal with external closed cell polyethylene coating (3 mm thick). Collars for upper attachments supplied.

Collars for rear and side entrances available on request

	A mm	B mm	C mm	Ø mm	Code	€
mod. 600	630	145	280	200-150 1 pz	37900176	182,00
mod. 800	830	180	280	200-150 1 pz	37900048	184,00
mod. 1000	1030	180	280	200-150 2 pz	37900053	196,00
mod. 1500	1530	180	280	200-150 2 pz	37900177	270,00
mod. 2000	2030	180	280	200-150 2 pz	37900178	348,00



VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessori VMC

Codice


€



LINEAR DIFFUSER WITH SINGLE HIDDEN SLOT WITH DEFLECTOR COMPLETE WITH INSULATED PLENUM AND COLLAR

Diffuser in black extruded anodized aluminum (RAL 9005).

Plenum in galvanized sheet, external covering in closed cell polyethylene (thickness 3 mm). Ceiling or wall installation, suitable for supply and return of air. Collars included



	A mm	B mm	C mm	Ø1 mm	Attacks		
mod. 600	600	143	305	150	n. 1	37900179	294,00
mod. 800	800	143	305	150	n. 2	37900180	350,00
mod. 1000	1000	143	305	150	n. 2	37900181	384,00
mod. 1500	1500	143	305	150	n. 3	37900182	542,00
mod. 2000	2000	143	305	150	n. 4	37900183	640,00

SIMPLE ARMORED FLEXIBLE ALUMINUM DUCT HOSE This is a flexible conduit 10 meters long and compressed

in a single package, consisting of a spiral armor

in rigid steel enclosed between two layers of aluminum / polyester.



MANDATA MAX
 $\text{Ø} \leq 204 \text{ p} = 4500 \text{ Pa}$
 $\text{Ø} > 204 \text{ p} = \frac{1,5 \times 10^7}{\sqrt{D^3}} \text{ Pa}$

RIPRESA MAX
 $\text{Ø} \leq 204 \text{ p} = 3400 \text{ Pa}$
 $\text{Ø} > 204 \text{ p} = \frac{10^7}{\sqrt{D^3}} \text{ Pa}$

	Ø indoor		
mod. 85 Lunghezza 10 mt	85 mm	37900432	32,00
mod. 102 Lunghezza 10 mt	102 mm	37900433	38,00
mod. 127 Lunghezza 10 mt	127 mm	37900434	44,00
mod. 140 Lunghezza 10 mt	140 mm	37900435	48,00
mod. 152 Lunghezza 10 mt	152 mm	37900436	50,00
mod. 160 Lunghezza 10 mt	102 mm	37900437	54,00
mod. 180 Lunghezza 10 mt	180 mm	37900438	64,00
mod. 203 Lunghezza 10 mt	203 mm	37900439	68,00
mod. 254 Lunghezza 10 mt	254 mm	37900440	88,00
mod. 305 Lunghezza 10 mt	305 mm	37900441	112,00
mod. 356 Lunghezza 10 mt	356 mm	37900442	140,00
mod. 457 Lunghezza 10 mt	457 mm	37900443	198,00
mod. 610 Lunghezza 10 mt	610 mm	37900444	284,00

FLEXIBLE DUCTED HOSE IN SIMPLE ALUMINUM WITH INTERNAL ANTIBACTERIAL TREATMENT Made of

aluminum, available from Ø 85 to Ø 610 mm.



	Ø indoor		
mod. 85 Length 10 mt	85 mm	37900203	42,00
mod. 102 Length 10 mt	102 mm	37900204	48,00
mod. 127 Length 10 mt	127 mm	37900205	58,00
mod. 152 Length 10 mt	152 mm	37900206	60,00
mod. 160 Length 10 mt	102 mm	37900207	66,00
mod. 180 Length 10 mt	180 mm	37900208	70,00
mod. 203 Length 10 mt	203 mm	37900209	84,00
mod. 254 Length 10 mt	254 mm	37900210	88,00
mod. 305 Length 10 mt	305 mm	37900211	114,00
mod. 356 Length 10 mt	356 mm	37900212	182,00
mod. 457 Length 10 mt	457 mm	37900213	258,00
mod. 610 Length 10 mt	610 mm	37900214	370,00

VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC

Code

€

ULTRA FLEXIBLE DUCTED PIPE IN POLYETHYLENE DOUBLE WALL THERMAL - PHONIC

It is a 10 m long heat-resistant flexible conduit compressed in a single package consisting of a double-walled polyethylene flexible pipe; 25 mm thick glass wool thermal insulation and 16 kg / m³ density; a polyethylene film to avoid condensation.



DELIVERY MAX
 $\varnothing \leq 152$ p= 7000 Pa
 $\varnothing > 204$ p= $\frac{13 \times 10^6}{\sqrt{D^3}}$ Pa

RECOVERY MAX
 $\varnothing \leq 152$ p= 4000 Pa
 $\varnothing > 204$ p= $\frac{10^6}{\sqrt{D^3}}$ Pa

	Ø interno		
mod. 85 Length 10 mt	85 mm	37900193	102,00
mod. 102 Length 10 mt	102 mm	37900089	130,00
mod. 127 Length 10 mt	127 mm	37900004	142,00
mod. 140 Length 10 mt	140 mm	37900194	154,00
mod. 152 Length 10 mt	152 mm	37900039	164,00
mod. 160 Length 10 mt	160 mm	37900196	170,00
mod. 185 Length 10 mt	185 mm	37900075	192,00
mod. 203 Length 10 mt	203 mm	37900001	208,00
mod. 254 Length 10 mt	254 mm	37900199	270,00
mod. 305 Length 10 mt	305 mm	37900200	310,00
mod. 356 Length 10 mt	356 mm	37900201	358,00
mod. 457 Length 10 mt	457 mm	37900202	502,00



COLLAR FOR PLENUM "A1" Ø 100 - 125 - 150

Anti-condensation PP material for simple / double wall ducted pipes, prepared with 4 holes for fixing to the plenum

Collarino per plenum "A1" Ø 100 - 125 - 150 37900263 20,00



COLLAR FOR PLENUM "B2" Ø 150 - 200

Anti-condensation PP material for simple / double wall ducted pipes, prepared with 4 holes for fixing to the plenum

Collarino per plenum "B2" Ø 150 - 200 37900226 22,00

COLLAR FOR PLENUM WITH INCORPORATED SHUTTER PP material available from Ø 102 to Ø 254,


operating temperature: from -30 ° C to +150 ° C,

reaction to fire: C-s1, d1



usable
only for single
or double wall
aluminum flexible pipe

Connection for flexible pipes with damper Ø 102	37900184	22,00
Connection for flexible pipes with damper Ø 127	37900185	26,00
Connection for flexible pipes with damper Ø 152	37900186	30,00
Connection for flexible pipes with damper Ø 160	37900187	30,00
Connection for flexible pipes with damper Ø 203	37900188	34,00
Connection for flexible pipes with damper Ø 254	37900189	38,00



VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC

Code

€




mod. C3



mod. C4

OVAL COLLAR FOR PLENUM "C3" / "D4"

Anti-condensation PP material for simple / double wall ducted pipes, prepared with 4 holes for fixing to the plenum




	A mm	B mm	C mm	Ø1 mm	Ø2 mm	Code	€
mod. C3 Ø 125/150	192	102	102	150	125	37900191	22,00
mod. D4 Ø 150/200	280	105	102	200	150	37900192	26,00



ANTICONDENSATION

INSULATED 3-WAY JUNCTION SUITABLE FOR PIPES FROM 150 TO 450 mm

- Operating temperature from 0 ° C to +70 ° C
- PP material
- insulating coating: polyethylene with aluminum coating
- for heating and air conditioning hoses (insulated and not)
- insulated reductions as an option




	Ø2 mm	Ø1 mm	Code	€
mod. 200 x 150 x 150	200	150	37900215	100,00
mod. 250 x 200 x 200	250	200	37900216	110,00
mod. 300 x 250 x 250	300	250	37900217	120,00
mod. 350 x 300 x 300	350	300	37900218	136,00
mod. 400 x 350 x 350	400	350	37900219	152,00
mod. 450 x 350 x 350	450	350	37900220	198,00



ANTICONDENSATION

REDUCTION (INSULATED) FOR INSULATED 3-WAY DERIVATIONS

- Operating temperature from 0 ° C to +70 ° C
- PP material
- insulating coating: polyethylene with aluminum coating
- only in combination with insulated 3-way outlets
- for heating and air conditioning hoses (insulated and not)




	Ø1 mm	Ø2 mm	Code	€
mod. da Ø 200 a Ø 150	150	200	37900445	34,00
mod. da Ø 250 a Ø 200	200	250	37900446	38,00
mod. da Ø 300 a Ø 250	250	300	37900447	42,00
mod. da Ø 350 a Ø 300	300	350	37900448	46,00



ANTICONDENSATION

3-WAY MULTIPLE JUNCTION FOR DUCTED PIPES

Material in PE H.D. with n. 3 multi-diameter connections



	Ø1 mm	Ø2 mm	Ø3 mm	Code	€
mod. Ø 250 x Ø 200 x Ø 150	150	200	250	37900449	118,00
mod. Ø 350 x Ø 250 x Ø 250	250	300	350	37900450	150,00


VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC

Code

€




MULTIPLE "Y" POLYSTYRENE JUNCTION FOR DUCTED PIPES Sintered polystyrene material, suitable for ducted pipes

	A mm	B mm	C mm	Ø Attacchi mm		
mod. big	560	566	260	250/200/150	37900451	114,00
mod. small	523	531	210	250/150/125	37900452	102,00



ANTICONDENSATION




3-WAY SIDE OFFSET FOR DUCTED PIPES Material in PE H.D. with 3 multidiameter connections

	Ø1 mm	Ø2 mm		
Graft from Ø 200 mm - Ø 150 mm	150	200	37900221	94,00
Graft from Ø 250 mm - Ø 150 mm	150/200	200	37900222	102,00
Graft from Ø 250 mm - Ø 200 mm	200	250	37900223	110,00



ANTICONDENSATION




DERIVAZIONE A 4 VIE PER TUBI CANALIZZATI Materiale in PE H.D. con 4 attacchi multidiametro

	Ø1 mm	Ø2 mm	Ø3 mm		
Ingressi per tubi Ø 200/150 mm	150	200	150	37900453	106,00

DERIVAZIONE SIMMETRICA A 90°

Materiale: acciaio zincato con guarnizione in EPDM a doppio labbro



	Ø mm	Ø D1 mm	E mm	L mm	L1 mm		
mod. Ø 80	80	80	36	180	65	37900237	52,00
mod. Ø 100	100	100	36	200	75	37900238	48,00
mod. Ø 125	125	125	36	225	88	37900041	54,00
mod. Ø 160	160	160	36	280	115	37900239	66,00
mod. Ø 200	200	36	36	300	125	37900224	84,00
mod. Ø 250	250	55	55	350	138	37900240	82,00
mod. Ø 300	300	50	50	400	175	37900241	180,00
mod. Ø 355	355	75	75	455	203	37900242	228,00
mod. Ø 400	400	75	75	500	225	37900243	264,00

VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC

Code

€


AIR INTAKE GRILLS IN WHITE PAINTED ALUMINUM consisting of a frame and a single row of adjustable wings arranged horizontally, they are equipped with a practical system fixing by means of invisible clips, offering a pleasant aesthetic result.



Dimensions mm	Air passage mm	Code	€
mod. 232 x 132	200 x 100	37900044	28,00
mod. 332 x 132	300 x 100	37900122	32,00
mod. 432 x 132	400 x 100	37900123	36,00
mod. 632 x 132	600 x 100	37900455	90,00
mod. 1032 x 132	1000 x 100	37900456	90,00
mod. 332 x 182	300 x 150	37900124	38,00
mod. 332 x 232	300 x 200	37900125	40,00
mod. 432 x 182	400 x 150	37900126	44,00
mod. 432 x 232	400 x 200	37900127	48,00
mod. 532 x 182	500 x 150	37900128	60,00
mod. 532 x 232	500 x 200	37900129	66,00
mod. 532 x 332	500 x 300	37900457	68,00




SQUARE DIFFUSERS IN ALUMINUM COMPLETE WITH DAMPERS AND 4-WAY PLENUMS PAINTED WHITE RAL - 9016



A	B	L	H	h1	Ø	Code	€
External dimensions mm	Width plenum mm	Hole Width mm	Height plenum mm	mm	Collar plenum mm		
295x295	250x250	295x295	235x235	160	100	37900458	226,00
370x370	370x370	325x325	310x310	205	150	37900459	278,00
445x445	445x445	400x400	385x385	220	200	37900460	316,00
520x520	520x520	475x475	460x460	220	200	37900461	430,00
598x598	598x598	550x550	535x535	245	250	37900462	566,00



HELICAL DIFFUSER 48 SLOTS IN ALUMINUM PAINTED WHITE RAL - 9016 COMPLETE WITH DAMPER AND PLENUM WITH HIGH OPERATING EFFICIENCY

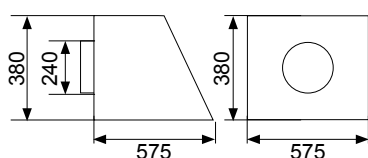


37900463 396,00

Values expressed in mm



HIGH INDUCTION DIFFUSER WITH ADJUSTABLE NOZZLES PAINTED WHITE RAL - 9010 COMPLETE WITH SHUTTER AND PLENUM

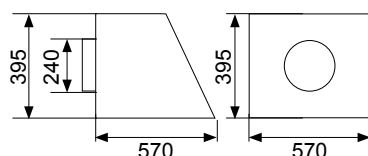

37900465 376,00

Values expressed in mm


VMC ACCESSORIES

Complete range of professional accessories for controlled mechanical ventilation

Accessories VMC


Code

€




ROUND BUILT-IN COPPER GRID WITH NET

	Ø A mm	Ø B mm	C mm		
mod. Ø 110	110	55	75	37900254	18,00
mod. Ø 125	125	55	93	37900255	22,00
mod. Ø 145	145	55	115	37900256	24,00
mod. Ø 170	170	55	135	37900257	34,00
mod. Ø 220	220	55	185	37900258	50,00



ROUND BUILT-IN ALUMINUM GRID WITH NET

	Ø A mm	Ø B mm	C mm		
mod. Ø 110	110	55	75	37900136	10,00
mod. Ø 125	125	55	93	37900195	12,00
mod. Ø 145	145	55	115	37900197	14,00
mod. Ø 170	170	55	135	37900381	16,00
mod. Ø 220	220	55	185	37900471	20,00

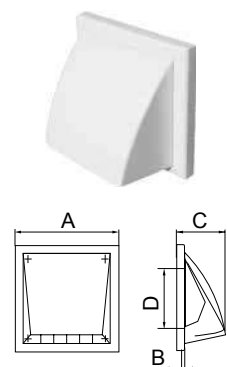

SQUARE GRILL WITH RECESSED WINDPROOF PROTECTION IN WHITE ABS PLASTIC

Designed for both recovery and delivery of air
 - recessed wall mounting or screws
 - operating temperature: from -40 ° C to +40 ° C

	A mm	B mm	C mm	D mm		
mod. 102	154	15	86	100	37900259	12,00
mod. 122	187	15	101	125	37900040	16,00
mod. 152	187	15	101	150	37900260	22,00


MIXED-FLOW IN-LINE FAN



The in-line extraction fan is ideal for ventilation in rigid and / or flexible circular ducts for the delivery or expulsion of air in domestic rooms, offices, shops and bathrooms. It is made of plastic material to reduce the formation of condensation and the already low noise of the fan both at minimum and maximum speed. Equipped with double power supply terminal board, it can be managed to work at two different speeds. The quick coupling / uncoupling system guarantees maximum speed during installation and routine maintenance. The supplied support allows installation both vertically and horizontally, on the floor, wall or ceiling.

TECHNICAL FEATURES

- made of ABS
- easy installation
- easily inspected
- 2 speeds
- operated by ON / OFF switch (not supplied)
- recommended for kitchens, bathrooms, offices, shops



	ØD mm	B mm	H mm	L mm	Peso		
mod. Ø 100	96	167	190	246	1,4 Kg	37900074	122,00
mod. Ø 125	123	167	190	246	1,4 Kg	37900326	160,00
mod. Ø 150	146	223	250	295	3,0 Kg	37900318	234,00
mod. Ø 200	199	239	261	295,5	6,4 Kg	37900319	314,00
mod. Ø 250	247	287	323	383	8,3 Kg	37900038	622,00